


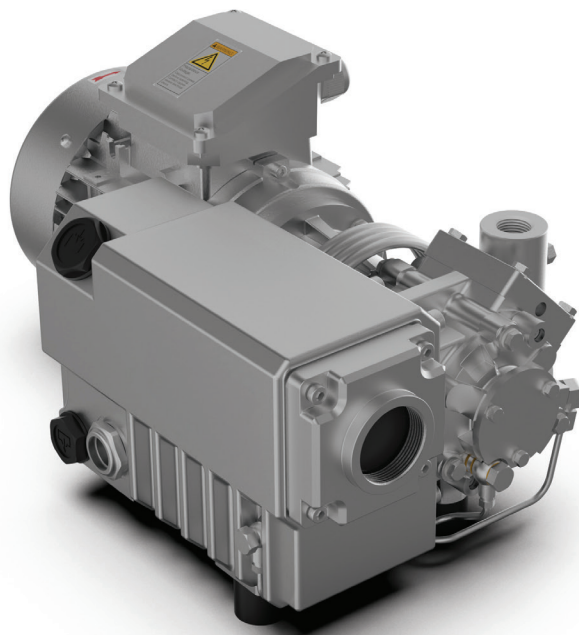

FEATURES

- Single stage, direct-driven
- Air-cooled, no water required
- Simple installation
- Low noise levels
- Compact design
- Integral exhaust filter, oil free discharge air
- Includes pressure gauge


APPLICATIONS

- Meat packaging
- Food processing
- Thermoforming
- Composites
- Medical
- Laboratory
- Vacuum cooling
- Robotics
- Degassing
- Autoclaves

OPTIONAL ACCESSORIES

- Oil level sight glass
- Exhaust pressure gauge
- Exhaust cover (threaded)
- **Pre-Assembled Vacuum Kit Available (KVRXA-21):** Includes all plumbing, filtration, check-valves, regulating valves, and gauges required for quick installation and easy maintenance.



PERFORMANCE (60HZ)

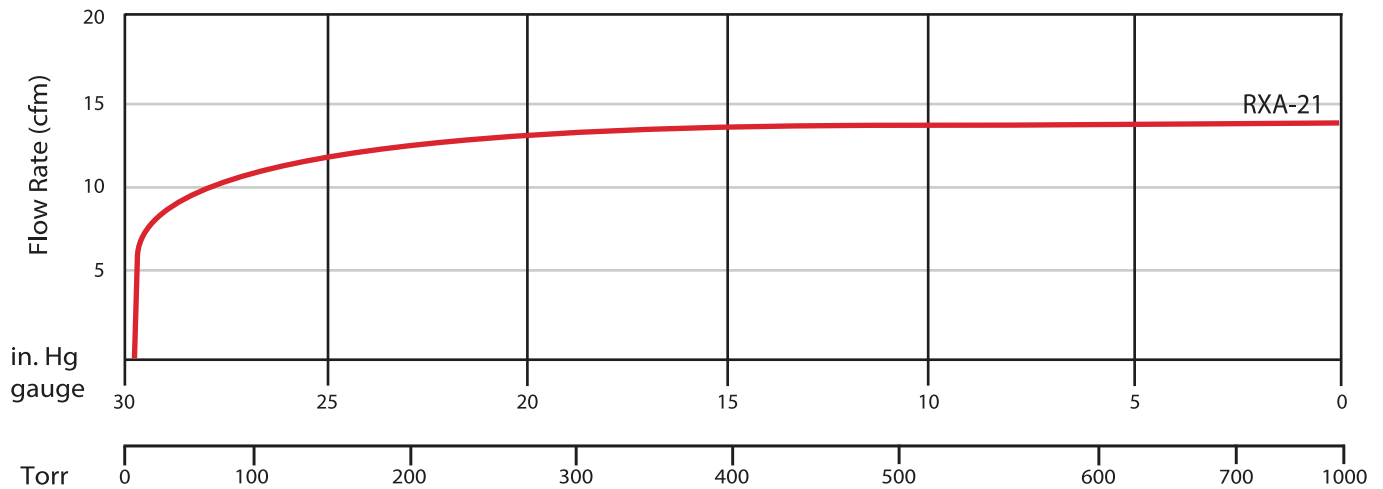

Model	Phase	Displacement (cfm)	Ultimate Continuous Vacuum (inHg/Torr)	Motor Output (hp)	Motor Speed (RPM)	Voltage (V)	FLA	Noise Level (dBA)	Approx. Weight (lb)	Oil Capacity (L)
RXA-21	3	14	29.86/1.5	1.2	3600	230/460	TBD	62	44	0.5
RXA-21-SP	1	14	29.86/1.5	1.2	3600	115-208/230	TBD	62	44	0.5

All measurements are $\pm 10\%$. Standard motor is Class 1 Div 2.

APPROXIMATE DIMENSIONS

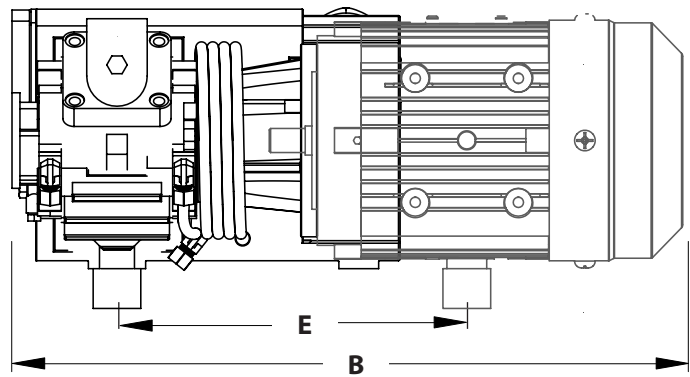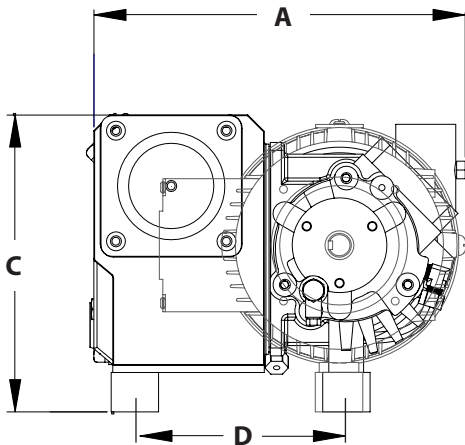

Model	A	B	C	D	E	Inlet/Outlet
RXA-21	9.5"	18.4"	7.4"	5.3	9.5	1.25" NPT

Please contact the factory for precise dimensions.

CONTACT

