









Features:


- Cooler running, outboard bearing provides maintenance-free operation
- Environmentally friendly oil-free technology
- Extremely quiet operation
- All motors are standard TEFC with Class F insulation, UL recognized, CE Compliant *Explosion-Proof motors available*
- Custom construction blowers are available
- Rugged die cast aluminum construction

Performance curve for Vacuum pump

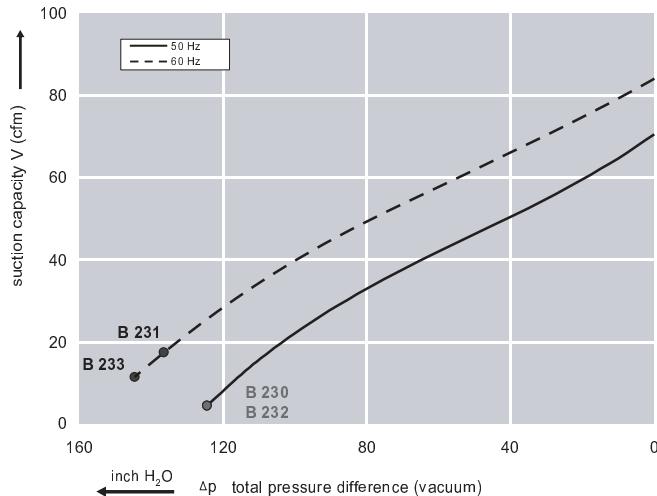

Performance curve for Compressor

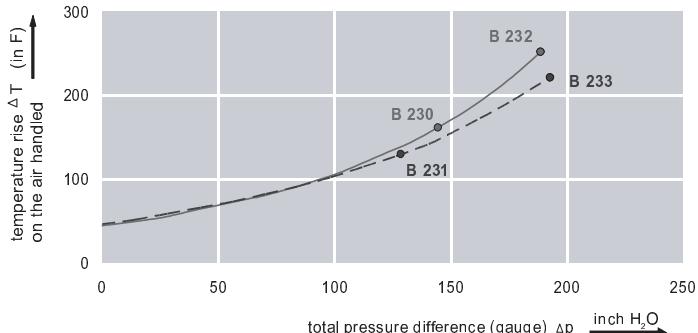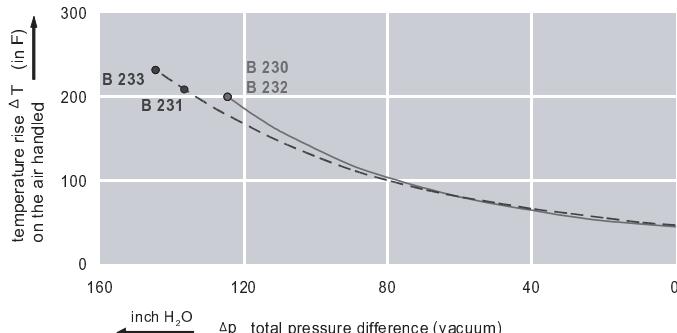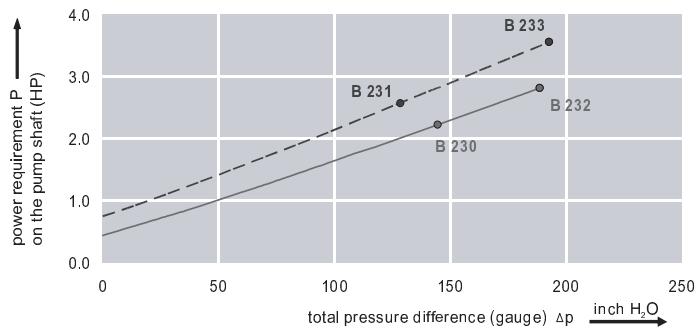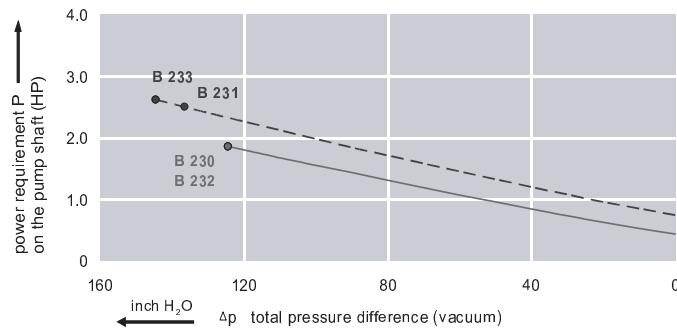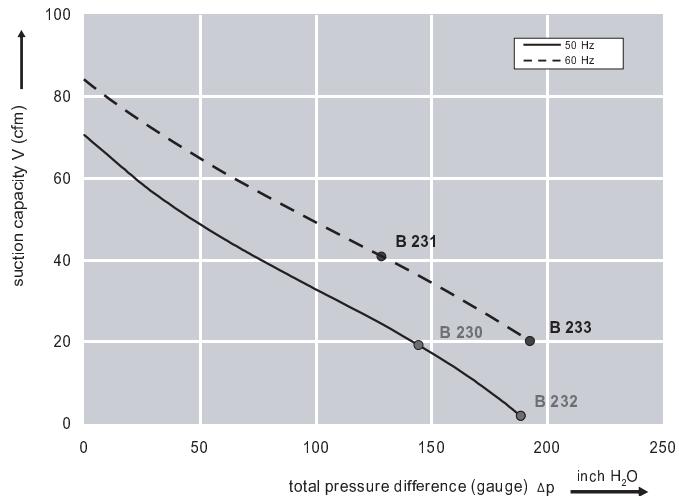

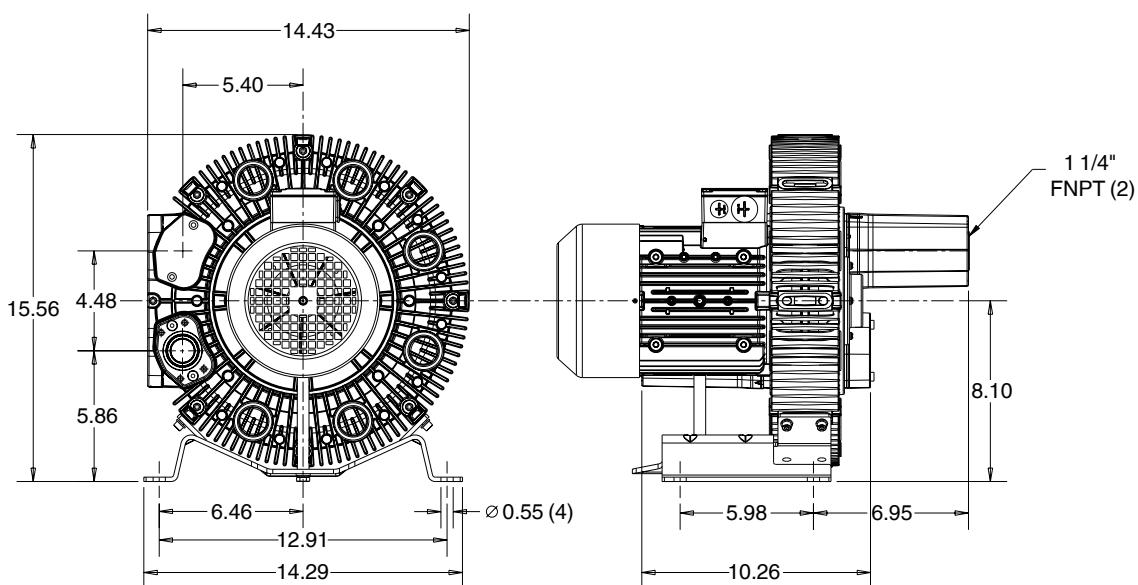Dimensions: (inches)

**Recommended
Accessories:**
Relief valve:

VC51Z (Vacuum)

PC51Z (Pressure)

Filter:

 ATF-125-1337
 (Vacuum)

 AFS-20-125-10
 (Pressure)

Specifications subject to change without notice. Please contact factory for specification updates.

Selection & Ordering Data - Type 3BA7510

Curve No.	Order No.	Fre-quency Hz	Rated power HP	Input voltage V	Input current A	Permissible total differential pressure Vacuum inch H ₂ O	Compressor inch H ₂ O	Sound pressure level dB(A)	Weight lbs
-----------	-----------	---------------	----------------	-----------------	-----------------	---	----------------------------------	----------------------------	------------

3~ 50/60 Hz IP55 insulation material class F

B 230	3BA7510-0AT16	50	2.01	200D ... 240D	345Y ... 415Y	7.5D	4.3Y	-124	145	64	57
B 231	3BA7510-0AT16	60	2.75	220D ... 250D	415Y ... 460Y	7.5D	4.4Y	-136	128	68	57
B 232	3BA7510-0AT26	50	2.95	200D ... 240D	345Y ... 415Y	9.7D	5.6Y	-124	189	64	64
B 233	3BA7510-0AT26	60	3.42	220D ... 250D	415Y ... 460Y	9.0D	5.3Y	-145	193	68	64

Suitable for 208 Volt Operation

All curves are rated at 14.7 psia and 68°F ambient conditions and are reported in SCFM referenced to 68°F and 14.696 psia sea level conditions. Curve values are nominal, actual performance may vary by up to 10% of the values indicated. For inlet temperatures above approximately 80°F or for handling gases other than air, please contact your Airtech sales representative for assistance.