



GAS DRIVEN AIR COMPRESSOR

THE MOST AFFORDABLE GAS DRIVEN ROTARY SCREW AIR COMPRESSOR AVAILABLE!



STANDARD G30

STACKED G30

“The Honda has a lower idle speed, creating less noise, which is much appreciated when used in residential settings. There is zero lag on air tools under high demand. We’ve been using VMAC for so long that old issues have been forgotten.”

-Chris Binks, Assistant Manager, KAL TIRE

30 CFM. 100% OF THE TIME.

VMAC G30 gas driven air compressors include a patented 30 CFM rotary screw air compressor designed to maintain max CFM 100% of the time, so operators don’t have to wait for their air compressor to fill up an air receiver tank. This maximizes air tool performance while providing maximum operator efficiency at the job site and eliminating downtime.


OVER 50% LIGHTER & SMALLER

VMAC G30 gas driven air compressors are engineered and manufactured for mobile applications. VMAC air compressors feature the latest rotary screw technology integrated into a compact, turn-key package that is significantly lighter and smaller than any other competitive model. With 2 optional configurations—standard or stacked—operators can fit more tools, equipment and supplies on your truck, without hassle.

INDUSTRY-LEADING RELIABILITY

VMAC G30 gas driven air compressors are proven to work in extreme cold climates across North America with factory -installed cold climate kit, that is included with the Stacked model, and optional with Standard model. Engines supplied by Honda come with an industry-leading 3-year warranty and VMAC rotary screw air compressors come with the industry’s first Lifetime Limited Warranty. For peace of mind, without the headache.



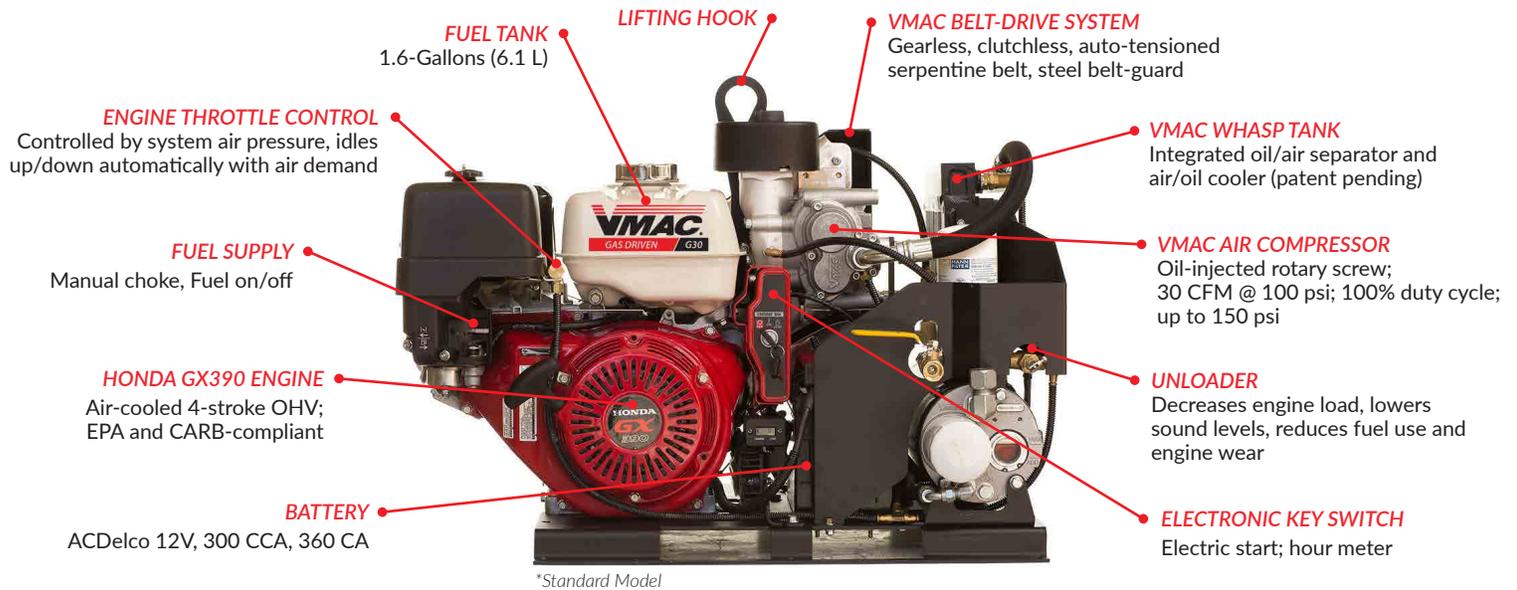

*Standard Model

SPECIFICATIONS

STANDARD

STACKED

Air Compressor Output	30 CFM @ 100 psi (150 psi max)	
Air Compressor Type	Belt-driven, 100% duty cycle, VMAC oil-injected rotary screw	
Engine	<ul style="list-style-type: none"> > Honda GX390 air cooled 4-stroke OHV with electric start, EPA and CARB compliant, > Honda approved application 	
Weight (wet)	Approximately 205 lb (93 kg)	Approximately 210 lb (95 kg)
Dimensions	33.5" (l) x 21.4" (w) x 23.9" (h); 85.1 cm (l) x 54.4 cm (w) x 60.7 cm (h)	20" (l) x 18" (w) x 38" (h); 50.8 cm (l) x 45.7 cm (w) x 96.5 cm (h)
Mounting Plate	25.0" (l) x 19.125" (w) / 63.5 cm (l) x 48.6 cm (w)	16.75" (l) x 10.75" (w) / 42.5 cm (l) x 27.3 cm (w)
Decibels (dB) @ 20 feet (6.1 meters)	67 - 81 dB	
Fuel Tank Capacity	1.6-Gallons (6.1 litres)	
Battery (included)	ACDelco 12V, 300 CCA, 360 CA	ACDelco 12V, 460 CCA, 575 CA
Control System	<ul style="list-style-type: none"> > 2-speed throttle control, responds to air demand > Electronic key switch with hour meter > Unloader reduces engine load, sound levels, fuel use and engine wear 	
Safety Features	<ul style="list-style-type: none"> > Compressor thermal protection circuit > Automatic rapid blow-down valve on 	<ul style="list-style-type: none"> > 200 psi pressure relief valve > Low engine oil pressure shutoff
Warranty	<ul style="list-style-type: none"> > Two years on all major components; VMAC air-ends are covered by VMAC's Lifetime Limited Warranty; > Honda engine is covered by Honda's 36-month Limited Warranty 	



OPTIONAL ACCESSORIES

REMOTE CONTROL PANEL A500042

Remote control panel with a ten foot extension for key switch, hour meter, choke, and unloader



COLD CLIMATE KIT* A500044

Heats up the G30 on the way to the jobsite, recommended in below freezing temperatures. (Included with Stacked model, optional for Standard model)

*800W Power Inverter required

800 W POWER INVERTER A500181

800 W, 12 V power inverter; required to power the VMAC G30 gas driven air compressor cold climate kit.



AIR RECEIVER TANKS - 12, 10 or 8-GALLONS

Standard: A500183/A500188 (plus, A500189)

12-Gallon or 8-Gallon Low Profile Air Receiver Tanks (base mounted) - with mounting frame that includes gauge, fittings, hose and valves

Stacked/Standard: A300047

10-Gallon Air Receiver Tank (remote mounted) - with gauge, fittings, valves, and tank drain

VMAC DEALER INFORMATION:

VMAC
AIR INNOVATED

T: 250-740-3200 | Toll Free: 1-877-912-6605 | Fax: 250-740-3201

E: sales@vmacair.com | www.VMACAIR.com

M200909