


### FEATURES

- Composite vane material for long life
- Oil level sight glass
- Vibraton isolators
- Anti-suck back valve
- Integral exhaust filters
- TEFC high-efficiency tri-voltage motor (208-230-460V 50/60)
- Wire mesh inlet screen




Airtech's L-Series rotary vane oil-flooded vacuum pump is a real workhorse. Reliability and durability are ensured by its simple design. Our L-Series Pump has integral exhaust filters, vibration isolators, and composite vane material which promotes longevity. The Airtech pump has an operating capacity range of 7-460 CFM while obtaining an end vacuum of 0.5 Torr.

### PERFORMANCE CURVES

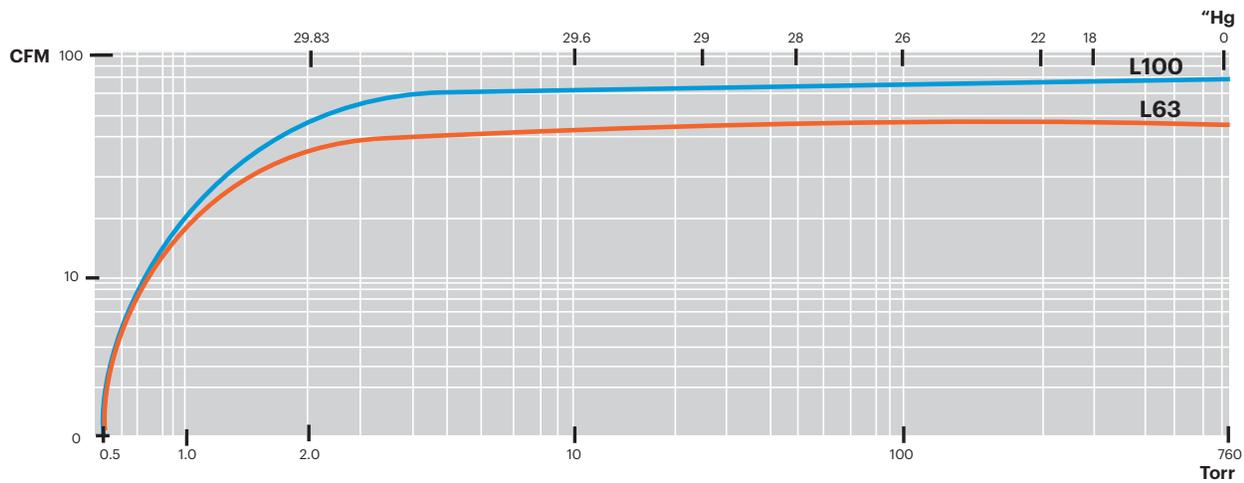

### POWER CONSUMPTION

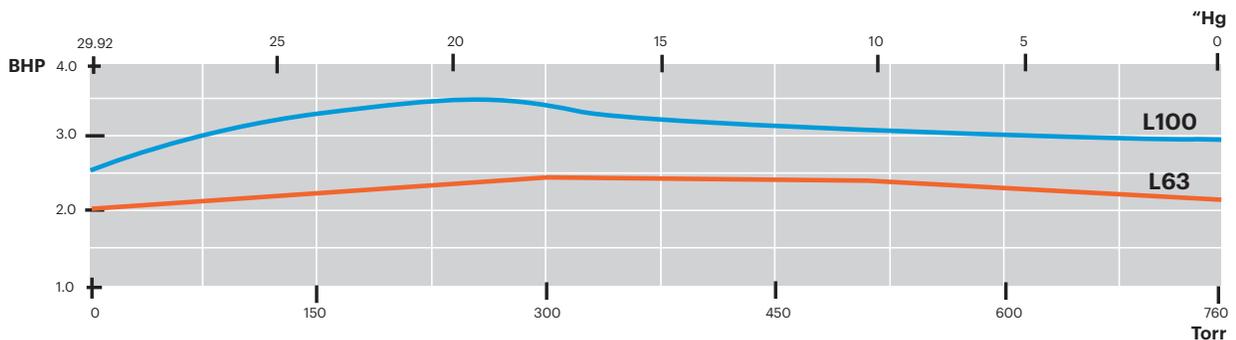



#### AIRTECH, INC.

RUTHERFORD, NJ 07070  
WWW.AIRTECHUSA.COM  
TEL: (888) 222-9940  
FAX: (201) 569-1696

Specifications are subject to change without notice. Please contact factory for specification updates.

### DIMENSIONS (INCHES)

**L63**  
**L100**

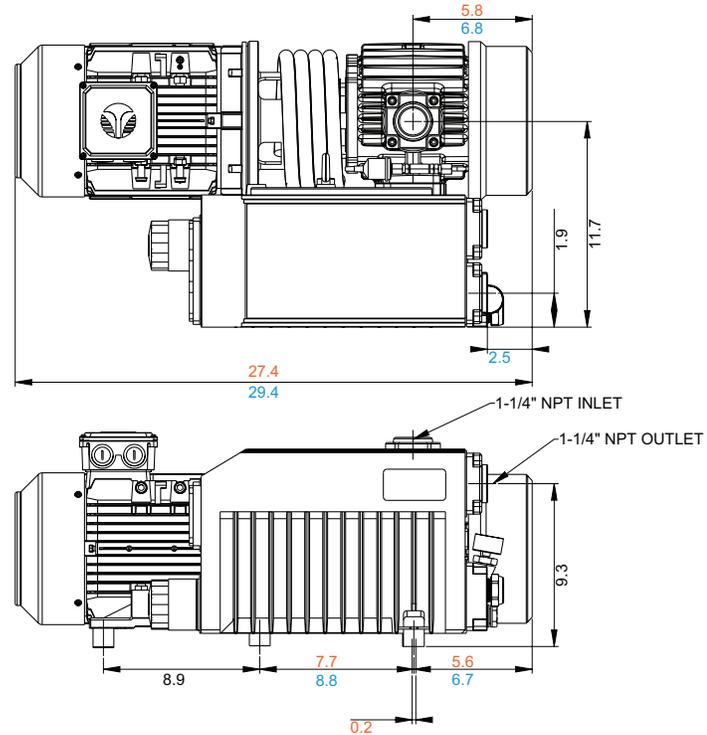

### PERFORMANCE DATA

Model	L63	L100
Free Air Displacement [CFM]	45	70
Motor Capacity (HP)	3.0	5.0
Speed (RPM)	1725	1725
Sound Level [dB (A)]	70	70
End Vacuum (Torr)	0.5	0.5
Weight with motor (lbs.)	175	185
Oil Quantity (Qts.)	2	2

#### AIRTECH, INC.

RUTHERFORD, NJ 07070  
WWW.AIRTECHUSA.COM  
TEL: (888) 222-9940  
FAX: (201) 569-1696