

### FEATURES

- Non-contact design
- Dry (oil-free) pumping chamber
- Air-cooled & direct driven
- Simple, Modular Construction
- Suitable for Variable Speed Applications




The Airtech PCX positive displacement rotary claw design is air cooled, dry-running and non-contacting. These features, along with quality construction results in a pressure pump that is extremely high in reliability and a long service life. The non-contact design eliminates internal wear

and maintenance. No water levels to check due to air-cooled operation and no sealing or lubricating oil is needed in the pumping chamber.


The claw shaped rotors inside the pump housing rotate in opposite directions, compressing the air and discharging through a silencer to the atmosphere. The two rotors are synchronized by gears that are oil lubricated to facilitate a long gear life.

### PERFORMANCE CURVE

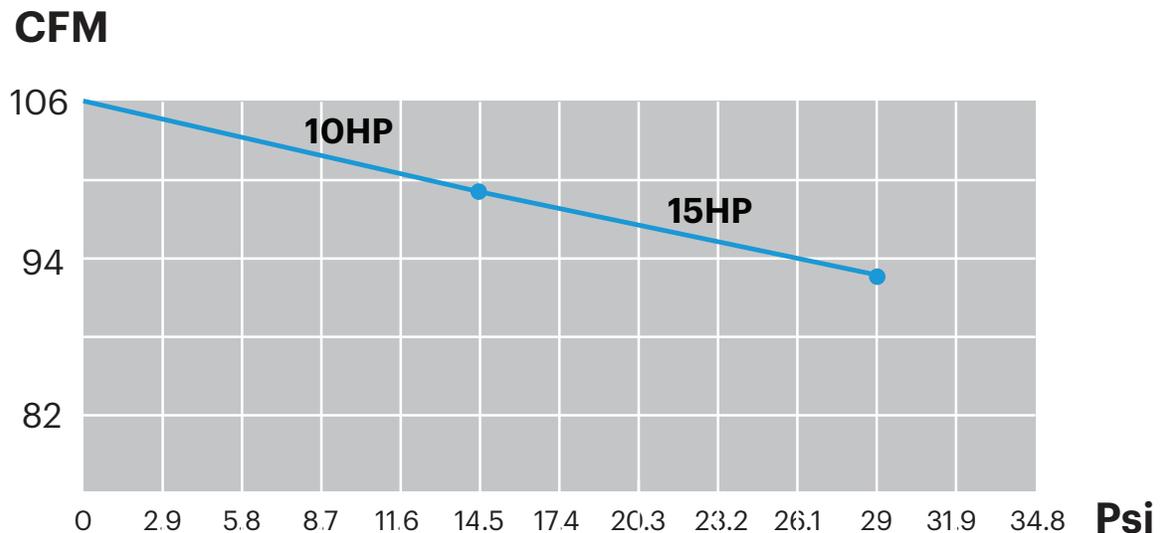

Specifications are subject to change without notice. Please contact factory for specification updates.

### DIMENSIONS (INCHES)

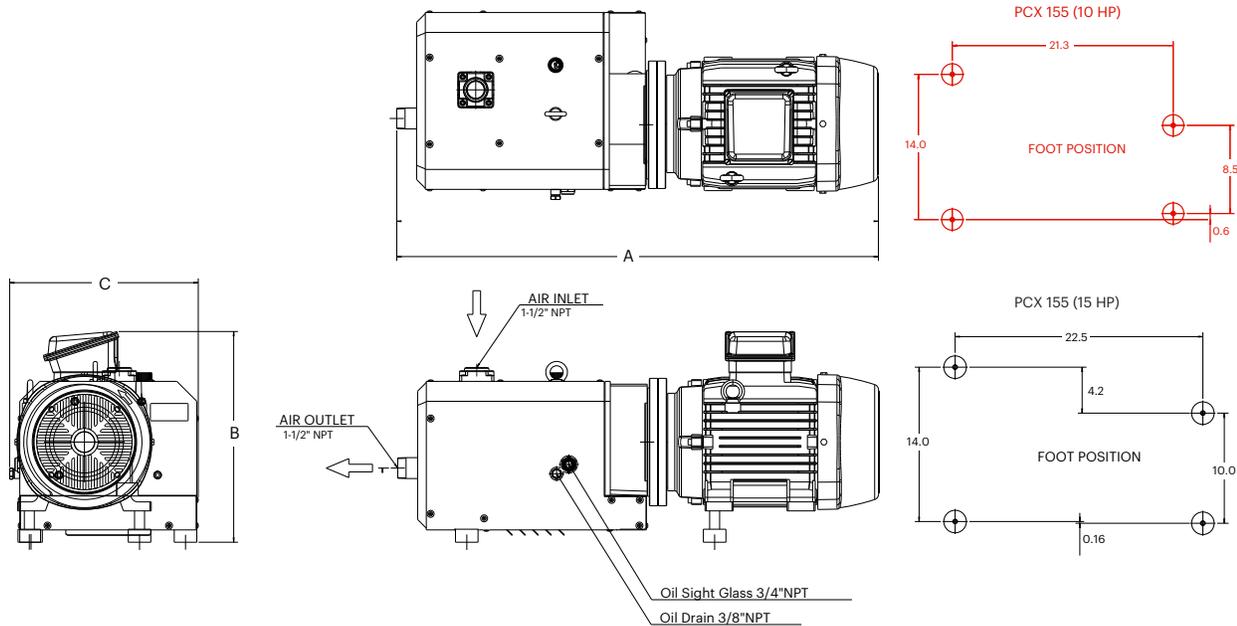

	A	B	C
<b>PCX 155 (10 HP)</b>	40.2	17.8	106
<b>PCX 155 (15 HP)</b>	43.7	19.1	17.4/29

### PERFORMANCE DATA

Model	PCX 155
<b>Capacity [CFM]</b>	106
<b>Ultimate pressure (psig)</b>	14.5/29
<b>Motor Rating (HP)</b>	10/15
<b>Speed (RPM)</b>	3450
<b>Voltage</b>	208-230/460
<b>Oil capacity (qt.)</b>	0.5
<b>Average noise level (dB[A])</b>	82
<b>Inlet/outlet connections</b>	1.5"
<b>Weight (lbs)*</b>	330

\*Depends on motor manufacturer

#### AIRTECH, INC.

RUTHERFORD, NJ 07070  
WWW.AIRTECHUSA.COM  
TEL: (888) 222-9940  
FAX: (201) 569-1696