



FEATURES

- Single stage, direct-driven
- Continuous, contactless, oil-free operation
- Energy efficient for substantial savings
- Minimal downtime
- Air-cooled, no water required
- Simple installation
- Virtually maintenance-free
- Low noise levels
- Integrated relief valve
- Includes inlet filter with inlet silencer

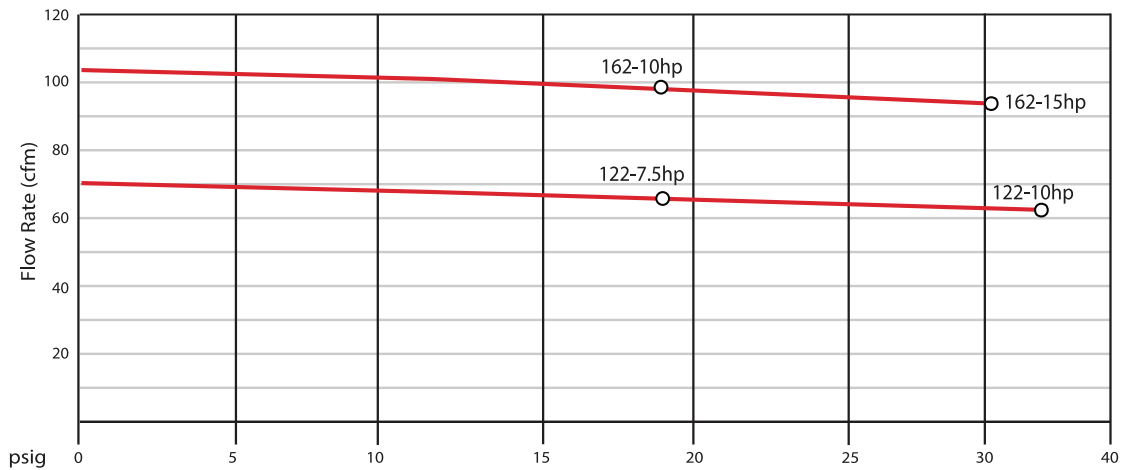
APPLICATIONS

Any oil-free application including:

- Transport
- Conveying
- Environmental
- Air sparging
- Fish farms

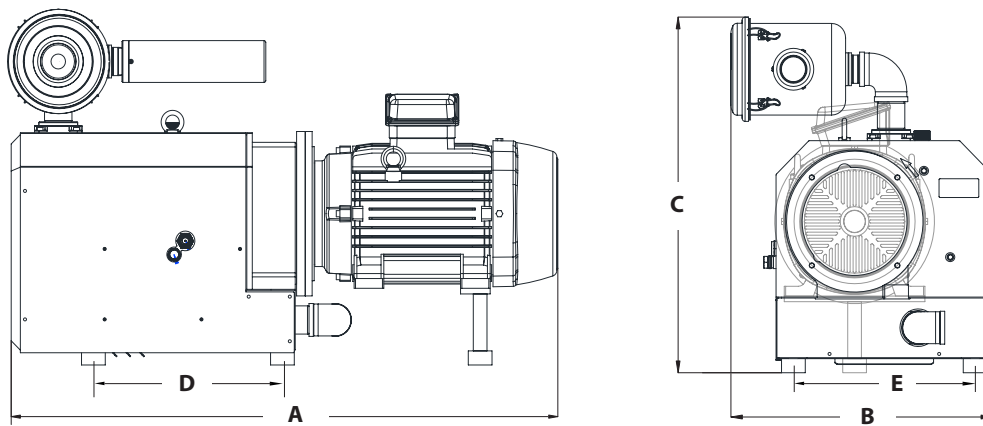
MOTOR VARIATIONS AVAILABLE

- Explosion-Proof
- Washdown
- 575v
- Single Phase (if applicable)

PERFORMANCE (60HZ)

Model	Phase	Displacement (cfm)	Pressure (psig)	hp	Motor Speed (RPM)	Voltage (V)	FLA	Noise Level (dBA)	Approx. Weight (lb)	Gear Oil Amt. (L)
RCP-122-7.5	3	71	18.84	7.5	3450	230/460	17.8/8.9	80	313	0.5
RCP-122-10	3	71	31.90	10.0	3450	230/460	23.0/11.5	80	313	0.5
RCP-162-10	3	106	17.40	10.0	3450	230/460	23.0/11.5	82	331	0.5
RCP-162-15	3	106	29.00	15.0*	3450	230/460	34.8/17.4	82	331	0.5

All measurements are $\pm 10\%$. Standard motor is Class 1 Div 2.

APPROXIMATE DIMENSIONS

Model	A	B	C	D	E	Inlet	Outlet
RCP-122-7.5	35.6"	17.1"	25.3"	15.0"	14.0"	1.50" NPT	1.50" NPT
RCP-122-10	35.6"	17.1"	25.3"	15.0"	14.0"	1.50" NPT	1.50" NPT
RCP-162-10	35.6"	17.1"	25.3"	15.0"	14.0"	1.50" NPT	1.50" NPT

Please contact the factory for precise dimensions.

CONTACT