



FEATURES

- Single stage, direct-driven
- Continuous, contactless, oil-free operation
- Energy efficient for substantial savings
- Minimal downtime
- Air-cooled, no water required
- Simple installation
- Virtually maintenance-free
- Low noise levels
- Integrated relief valve
- Includes inlet filter with inlet silencer

APPLICATIONS

Any oil-free application including:


- Transport
- Conveying
- Environmental
- Air sparging
- Fish farms
- Aeration

MOTOR VARIATIONS AVAILABLE

- Explosion-Proof
- Washdown
- 575v
- Single Phase (if applicable)

PERFORMANCE (60HZ)



RCP-402

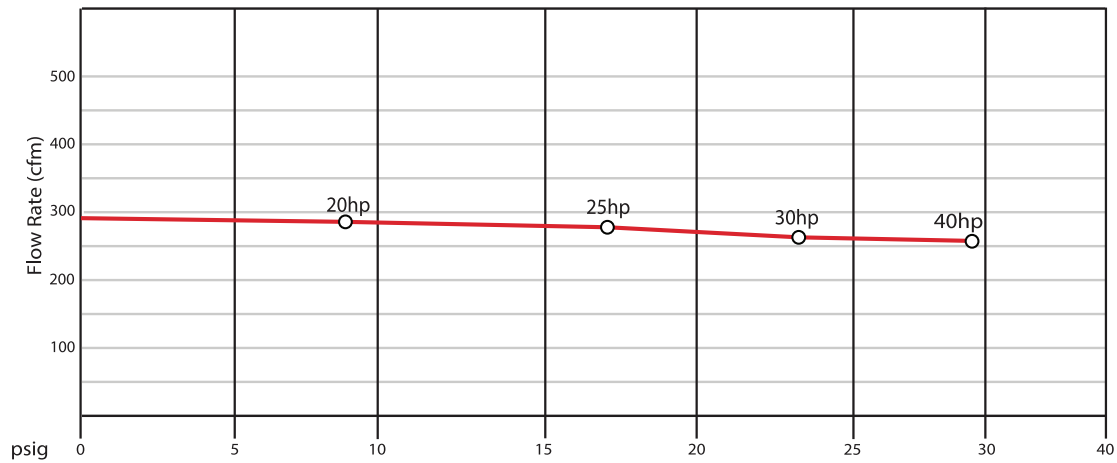

Model	Phase	Displacement (cfm)	Pressure (psig)	hp	Motor Speed (RPM)	Voltage (V)	FLA	Noise Level (dBA)	Approx. Weight (lb)	Gear Oil Amt. (L)
RCP-402-20	3	283	8.7	20.0	3450	230/460	46.4/23.2	82	695	1.8
RCP-402-25	3	283	17.4	250	3450	230/460	57.8/28.9	82	695	1.8
RCP-402-30	3	283	23.2	30.0	3450	230/460	69.0/34.5	82	695	1.8
RCP-402-40	3	283	29.0	40.0	3450	230/460	92.2/46.1	82	695	1.8

All measurements are $\pm 10\%$. Standard motor is Class 1 Div 2.

APPROXIMATE DIMENSIONS

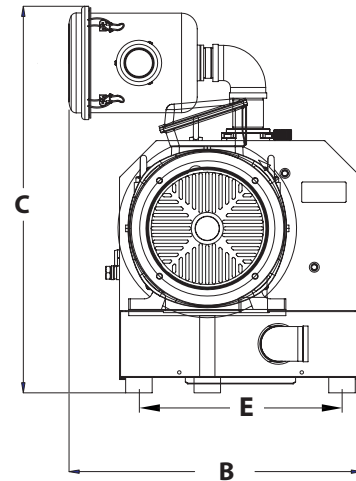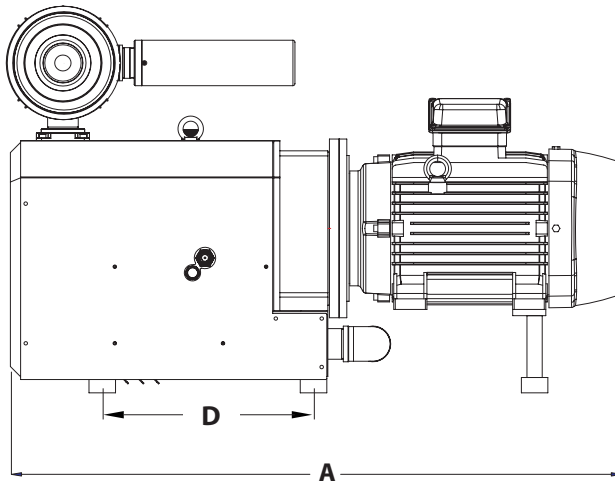

Model	A	B	C	D	E	Inlet	Outlet
RCP-402-20	50.2"	26.5"	39.5"	19.8"	18.1"	3.00" NPT	3.00" NPT
RCP-402-25	50.2"	26.5"	39.5"	19.8"	18.1"	3.00" NPT	3.00" NPT
RCP-402-30	52.8"	26.5"	39.5"	19.8"	18.1"	3.00" NPT	3.00" NPT
RCP-402-40	54.9"	26.5"	39.5"	19.8"	18.1"	3.00" NPT	3.00" NPT

Please contact the factory for precise dimensions.

CONTACT

