
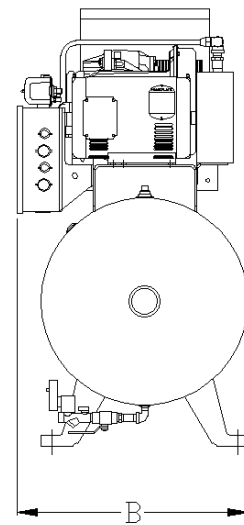
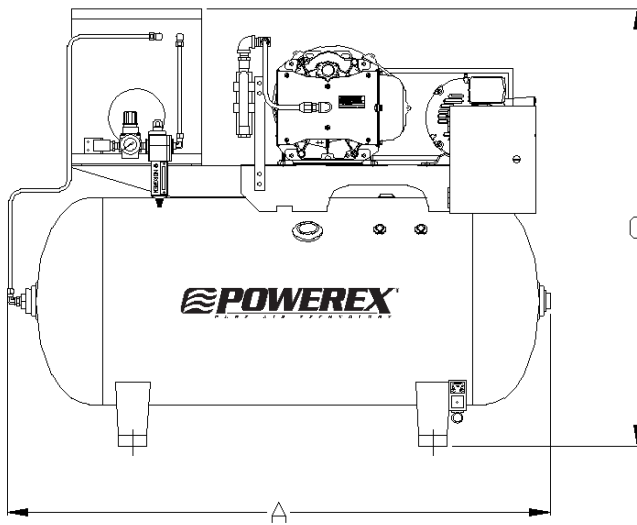


Dimensions				
Model	Dim. A	Dim. B	Dim. C	Outlet
STS0301	46"	21"	35"	1/2"
STS1301	46"	21"	35"	1/2"
STS0501	46"	21"	35"	1/2"
STS1511	46"	21"	35"	1/2"
STS0302	53"	23"	43"	1/2"
STS1302	53"	23"	43"	1/2"
STS0502	53"	23"	43"	1/2"
STS1512	53"	23"	43"	1/2"

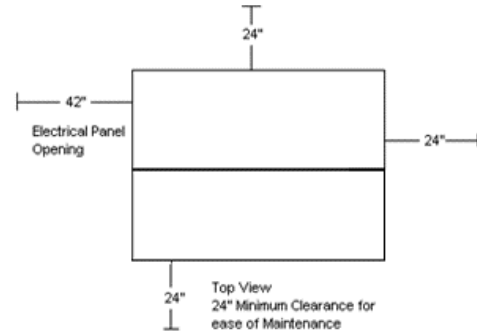

Tankmount Scroll Air Compressors										
Model	HP ¹	SCFM @ 100 PSIG ³	Maximum Pressure (PSIG)	Tank Size (gal)	BTU/Hr	dB(A) Level	System F.L.A.			System Weight (lbs)
							208V	230V	460V	
STS0301	3	8.8 (7.1)	116 (145)	30	7,635	72	8.5	7.7	3.9	320
STS1301	3	8.8 (7.1)	116 (145)	30	7,635	72	16.8*	16	-	335
STS0501	5	15.2 (12.5)	116 (145)	30	12,725	72	14	12.7	6.3	345
STS1511	5	15.2 (12.5)	116 (145)	30	12,725	72	24	23	-	360
STS0302	3	8.8 (7.1)	116 (145)	60	7,635	72	8.5	7.7	3.9	430
STS1302	3	8.8 (7.1)	116 (145)	60	7,635	72	16.8*	16	-	445
STS0502	5	15.2 (12.5)	116 (145)	60	12,725	72	14	12.7	6.3	455
STS1512	5	15.2 (12.5)	116 (145)	60	12,725	72	24	23	-	470

Notes:

- 1 – Actual BHP is less than rated name plate. Contact Powerex for BHP rating.
- 2 – 3 Year Limited Warranty
- 3 – Systems are available with high pressure option. Values for system with high pressure option added are indicated in parentheses.
- * System is usable at 208 volts, but should not be used at any value below that voltage.